

# MOL 3400 / 4100 Oil Burner



## **MOL 3400/4100 Oil Burner features:**


- Energy saving and compatible with environmental requirements
- Quiet in operation and designed for easy maintenance
- Reliable and trouble-free
- Designed and approved in accordance with the European Standard EN 267
- Suitable for high resistance boilers
- Industry standard components easily available
- 2 stage or fully modulating operation
- Plug-in contact facilitates the installation
- Fuel – Light distillate oil Class D (1.5-5.5 cSt @ 40°C)
- All kW ratings are nett CV



For more information on all Nu-way products  
please visit [www.nu-way.co.uk](http://www.nu-way.co.uk)

  
**Enertech Group**

Type		MOL 3400	MOL 4100
Capacity	kW	2768-3443	3453-4132
Motor	V/Hz	400 / 50	
	kW / A (Fuse HRC)	3400-36 7.5 / 3 x 25	4100-36 7.5 / 3 x 25
		3400-41 11 / 3 x 30	4100-41 11 / 3 x 30
		3400-44 15 / 3 x 40	4100-44 15 / 3 x 40
Start Run Current	Amps	3400-36 57 / 15.6	4100-36 57 / 15.6
		3400-41 72 / 22.8	4100-41 72 / 22.8
		3400-44 92 / 29.7	4100-44 92 / 29.7
Control box		Satronic / Siemens	Satronic / Siemens
Fuel pump		Suntec / HP Technik	Suntec / HP Technik
2-Stage		•	•
Gross weight	kg	365	370
Volume	m <sup>3</sup>	1.872	1.872

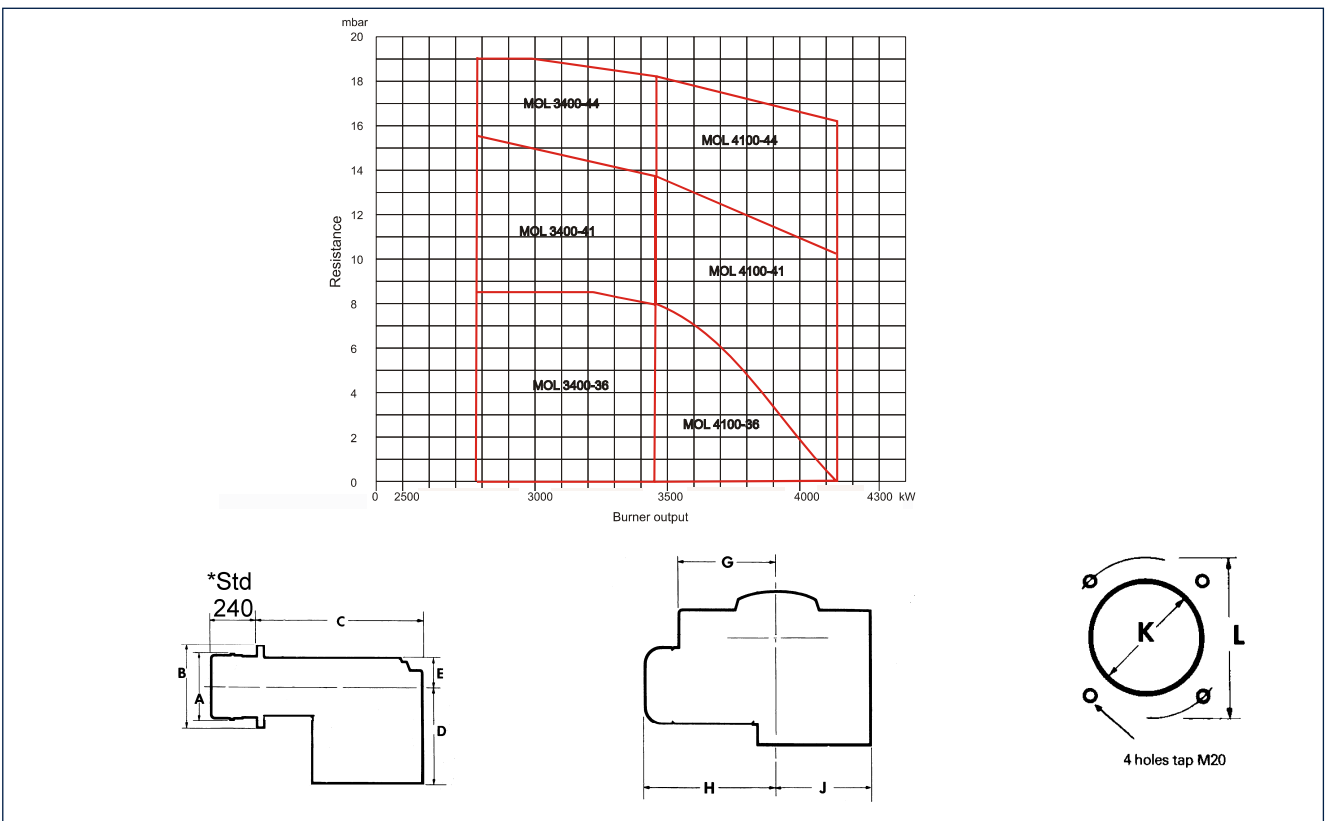

Burner	A	B	C	D	E	F	G	H	J	K	L PCD
MOL 3400-36 T3S	325	420	910	500	145	600	535	545	435	330	454
MOL 3400-41 T3S	325	420	910	500	145	600	535	545	435	330	454
MOL 3400-44 T3S	325	420	910	500	145	600	535	545	435	330	454
MOL 4100-36 T3S	325	420	910	500	145	600	535	545	435	330	454
MOL 4100-41 T3S	325	420	910	500	145	600	535	545	435	330	454
MOL 4100-44 T3S	325	420	910	500	145	600	535	545	435	330	454

\* Extended Lengths Available

Enertech Limited, P O Box 1, Vines Lane  
Droitwich, Worcestershire, WR9 8NA

tel: +44 (0) 1905 794331 • fax: +44 (0) 1905 794017  
email: info@nu-way.co.uk • web: www.nu-way.co.uk

